

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification 6 : <b>H04B 7/26, H04L 1/12, H04Q 7/38</b></p>	<p><b>A1</b></p>	<p>(11) International Publication Number: <b>WO 95/07578</b></p> <p>(43) International Publication Date: <b>16 March 1995 (16.03.95)</b></p>		
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%; vertical-align: top; padding: 5px;"> <p>(21) International Application Number: <b>PCT/US94/10087</b></p> <p>(22) International Filing Date: <b>8 September 1994 (08.09.94)</b></p> <p>(30) Priority Data: <b>118,473                      8 September 1993 (08.09.93)      US</b></p> <p>(71) Applicant: <b>QUALCOMM INCORPORATED [US/US]; 6455 Lusk Boulevard, San Diego, Ca 92121 (US).</b></p> <p>(72) Inventors: <b>GARDNER, William, R.; 1072 Hayes Avenue, San Diego, CA 92103 (US). JACOBS, Paul, E.; 1684 Torrance Street, San Diego, CA 92103 (US). PADOVANI, Roberto; 12634 Futura Street, San Diego, CA 92130 (US). ZIV, Noam, A.; 10968 Corte Playa Barcelona, San Diego, CA 92124 (US). LAM, S., Katherine; 9858 Caminito Calor, San Diego, CA 92131 (US). DeJACO, Andrew, P.; 10424 Flanders Cove, San Diego, CA 92126 (US).</b></p> <p>(74) Agent: <b>MILLER, Russell, B.; Qualcomm Incorporated, 6455 Lusk Boulevard, San Diego, CA 92121 (US).</b></p> </td> <td style="width: 50%; vertical-align: top; padding: 5px;"> <p>(81) Designated States: <b>AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MN, MW, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SI, SK, TJ, TT, UA, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD).</b></p> <p><b>Published</b> <i>With international search report.</i></p> </td> </tr> </table>			<p>(21) International Application Number: <b>PCT/US94/10087</b></p> <p>(22) International Filing Date: <b>8 September 1994 (08.09.94)</b></p> <p>(30) Priority Data: <b>118,473                      8 September 1993 (08.09.93)      US</b></p> <p>(71) Applicant: <b>QUALCOMM INCORPORATED [US/US]; 6455 Lusk Boulevard, San Diego, Ca 92121 (US).</b></p> <p>(72) Inventors: <b>GARDNER, William, R.; 1072 Hayes Avenue, San Diego, CA 92103 (US). JACOBS, Paul, E.; 1684 Torrance Street, San Diego, CA 92103 (US). PADOVANI, Roberto; 12634 Futura Street, San Diego, CA 92130 (US). ZIV, Noam, A.; 10968 Corte Playa Barcelona, San Diego, CA 92124 (US). LAM, S., Katherine; 9858 Caminito Calor, San Diego, CA 92131 (US). DeJACO, Andrew, P.; 10424 Flanders Cove, San Diego, CA 92126 (US).</b></p> <p>(74) Agent: <b>MILLER, Russell, B.; Qualcomm Incorporated, 6455 Lusk Boulevard, San Diego, CA 92121 (US).</b></p>	<p>(81) Designated States: <b>AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MN, MW, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SI, SK, TJ, TT, UA, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD).</b></p> <p><b>Published</b> <i>With international search report.</i></p>
<p>(21) International Application Number: <b>PCT/US94/10087</b></p> <p>(22) International Filing Date: <b>8 September 1994 (08.09.94)</b></p> <p>(30) Priority Data: <b>118,473                      8 September 1993 (08.09.93)      US</b></p> <p>(71) Applicant: <b>QUALCOMM INCORPORATED [US/US]; 6455 Lusk Boulevard, San Diego, Ca 92121 (US).</b></p> <p>(72) Inventors: <b>GARDNER, William, R.; 1072 Hayes Avenue, San Diego, CA 92103 (US). JACOBS, Paul, E.; 1684 Torrance Street, San Diego, CA 92103 (US). PADOVANI, Roberto; 12634 Futura Street, San Diego, CA 92130 (US). ZIV, Noam, A.; 10968 Corte Playa Barcelona, San Diego, CA 92124 (US). LAM, S., Katherine; 9858 Caminito Calor, San Diego, CA 92131 (US). DeJACO, Andrew, P.; 10424 Flanders Cove, San Diego, CA 92126 (US).</b></p> <p>(74) Agent: <b>MILLER, Russell, B.; Qualcomm Incorporated, 6455 Lusk Boulevard, San Diego, CA 92121 (US).</b></p>	<p>(81) Designated States: <b>AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MN, MW, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SI, SK, TJ, TT, UA, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD).</b></p> <p><b>Published</b> <i>With international search report.</i></p>			
<p>(54) Title: <b>METHOD AND APPARATUS FOR DETERMINING THE TRANSMISSION DATA RATE IN A MULTI-USER COMMUNICATION SYSTEM</b></p> <div style="text-align: center; margin: 20px 0;"> </div>				
<p>(57) Abstract</p> <p>A method and apparatus for controlling the data rates for communications to and from a base station (2) and a plurality of remote users (4). The usage of the communications resource whether the forward link resource, from base station (2) to remote users (4), or reverse link resource, from remote users (4) to base station (2), is measured. The measured usage value is compared against at least one predetermined threshold value and the data rates of communications or a subset of communications on said communications resource is modified in accordance with said comparisons.</p>				

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

## METHOD AND APPARATUS FOR DETERMINING THE TRANSMISSION DATA RATE IN A MULTI-USER COMMUNICATION SYSTEM

### 5 BACKGROUND OF THE INVENTION

#### I. Field of the Invention

10 The present invention relates to communications systems. More particularly, the present invention relates to a novel and improved method and apparatus for maximizing total average service quality to users in a multi-user communication system by controlling the data transmission rates to and from users of the multi-user communication system.

#### 15 II. Description of the Related Art

The term "multiple access" refers to the sharing of a fixed communications resource by a plurality of users. A typical example of such a fixed communications resource is bandwidth. There are three basic ways  
20 to increase the throughput or data rate of an individual user accessing a communications resource. The first way is to increase the transmitters radiated power or alternatively to reduce system losses so that the received signal to noise ratio (SNR) is increased. The second way is to increase the allocation of bandwidth to the user. The third approach is to make  
25 allocation of the communications resource more efficient.

Some of the more common methods of providing multiple access to a communications resource involve both analog and digital communication modulation schemes. Such schemes include frequency division, time division and spread spectrum techniques. In frequency  
30 division multiple access (FDMA) techniques, each user is allocated one or more specific sub-bands of frequency. In time division multiple access (TDMA) techniques, periodically recurring time slots are identified, and for each segment of time each user is allocated one or more time slots. In some TDMA systems, users are provided a fixed assignment in time, and in other  
35 systems users may access the resource at random times. In spread spectrum communications, users share a common frequency band. Using frequency hopping (FH) modulation, the signal is modulated upon a carrier which changes in frequency according to a predetermined plan. In direct sequence (DS) modulation, the user signal is modulated with a pseudorandom code.  
40 In one type of code division multiple access (CDMA) technique which uses

direct sequence spread spectrum modulation, a set of orthogonal or nearly orthogonal spread spectrum codes (each using full channel bandwidth) are identified, and each user is allocated one or more specified codes.

In all multiple access schemes, a plurality of users shares a communications resource without creating unmanageable interference to each other in the detection process. The allowable limit of such interference is defined to be the maximum amount of interference such that the resulting transmission quality is still above a predetermined acceptable level. In digital transmission schemes, the quality is often measured by the bit error rate (BER) or frame error rate (FER). In digital speech communications systems, the overall speech quality is limited by data rate allowed for each user, and by the BER or FER.

Systems have been developed to minimize the data rate required for a speech signal while still providing an acceptable level of speech quality. If speech is transmitted by simply sampling and digitizing the analog speech signal, a data rate on the order of 64 kilobits per second (Kbps) is required to achieve a speech quality equivalent to that of a conventional analog telephone. However, through the use of speech analysis, followed by the appropriate coding, transmission, and resynthesis at the receiver, a significant reduction in the data rate can be achieved with a minimal decrease in quality.

Devices which employ techniques to compress speech by extracting parameters that relate to a model of human speech generation are typically called vocoders. Such devices are composed of an encoder, which analyzes the incoming speech to extract the relevant parameters, and a decoder, which resynthesizes the speech using the parameters which are received from the encoder over the transmission channel. As the speech changes, new model parameters are determined and transmitted over the communications channel. The speech is typically segmented into blocks of time, or analysis frames, during which the parameters are calculated. The parameters are then updated for each new frame.

A more preferred technique to accomplish data compression, so as to result in a reduction of information that needs to be sent, is to perform variable rate vocoding. An example of variable rate vocoding is detailed in U.S. Patent Application Serial No. 08/004,484 entitled "Variable Rate Vocoder," assigned to the assignee of the present invention and incorporated herein by reference. Since speech inherently contains periods of silence, i.e. pauses, the amount of data required to represent these periods can be reduced. Variable rate vocoding most effectively exploits this fact by

reducing the data rate for these periods of silence. A reduction in the data rate, as opposed to a complete halt in data transmission, for periods of silence overcomes the problems associated with voice activity gating while facilitating a reduction in transmitted information, thus reducing the overall interference in a multiple access communication system.

It is the objective of the present invention to modify the variability of the transmission rate of variable rate vocoders, and any other variable rate data source, in order to maximize utilization of the communications resource.

10

### SUMMARY OF THE INVENTION

The present invention is a novel and improved method and apparatus for maximizing total average service quality to users in a multi-user communication system by controlling the data transmission rates to and from users of the multi-user communication system.

In the present invention, usage of the available communication resource is monitored. When the usage of the available communication resource becomes too great for a given communications link, and thus the quality falls below a predetermined limit, the data rate to or from the users is limited to free up a portion of the available communication resource. When the usage of the communications resource becomes small, the data rate to or from the users is allowed to increase above the previous limit.

For example, if the communications link from remote users to a main communications center, hereafter known as the reverse link, becomes overloaded, the main communications center transmits a signaling message requesting that the users, or selected ones of the users, decrease their average transmission data rate. At the remote user end, the signaling message is received and the transmission rate for the remote user is lowered in accordance with the signaling message.

The remote user, in the example, may be transmitting speech data or other digital data. If the user is transmitting speech data, then his transmission data rate may be adjusted using a variable rate vocoder as is described in above mentioned Application Serial No. 08/004,484. The present invention is equally applicable to any variable rate vocoding strategy when the remote user is transmitting speech data. If the user is transmitting digital data that is not speech data, the system can optionally instruct the remote user to modify the transmitted data rate for the specific digital data source.

On the communication link between the main communication center and the remote users, hereafter known as the forward link, the main communication center monitors the fraction of its total resource capacity that is being used for communicating to the remote users. If the fraction of the communications resource being used is too large, the main communication center will decrease the permitted average transmission data rate to each user or a subset of users. If the fraction of the communications resource being used is too small, the main communication center will permit the average data rate for each user to increase. As in the reverse link, the control of the data rate may be selective in nature based upon the nature of the data (speech or non-speech) being transmitted to the remote users.

## BRIEF DESCRIPTION OF THE DRAWINGS

The features, objects, and advantages of the present invention will become more apparent from the detailed description set forth below when taken in conjunction with the drawings in which like reference characters are identified correspondingly throughout and wherein:

Figure 1 is a block diagram illustrating multiple remote (mobile) users accessing a main communications center (cell base station);

Figure 2 is a block diagram illustrating the effects of a multi-cell (multiple main communications centers) environment on data reception at a remote (mobile) user;

Figure 3 is a graph of average service quality versus number of users at a particular average transmission data rate;

Figure 4 is a graph of average service quality versus number of users for three different average transmission data rates;

Figure 5 is a flowchart of the system monitor and control operation;

Figure 6 is a communication resource pie chart for forward link communications;

Figure 7 is a communication resource pie chart for reverse link communications;

Figure 8 is a communication resource pie chart illustrating the actions to be taken with respect to different fractions of resource usage;

Figure 9 is a communication resource pie chart illustrating conditions under which the data rate would be decreased by the control mechanism of the present invention

Figure 10 is a communication resource pie chart illustrating the effects of decreasing the data rate of the previous communications resource;

Figure 11 is a block diagram of the monitor and control system for controlling reverse link communications located at the main communications center;

Figure 12 is a block diagram of the monitor and control system for controlling reverse link communications located at the remote user; and

Figure 13 is a block diagram of the forward link monitor and control apparatus.

10

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Figure 1 illustrates the multi-user communications system communications between remotes users 4 and the main transmission center 2. In the exemplary embodiment these communications are conducted by means of a code division multiple access (CDMA) multi-user scheme, which is detailed in U.S. Patent Serial No. 4,901,307 entitled "Spread Spectrum Multiple Access Communication System Using Satellite of Terrestrial Repeaters (CDMA)," and U.S. Patent Serial No. 5,103,459 entitled "System and Method for Generating Signal Waveform in a CDMA Cellular Telephone System (CDMA)," both assigned to the assignee of the present invention and incorporated by reference herein. The communications that occur from the remote users to the main transmission center are referred to as reverse link communications. The communications link that enables communications from remote users 4 to a cell base station 2 is referred to as the reverse link. In a CDMA system, system user capacity is a function of the level of interference in the system.

Figure 2 illustrates the two main issues that result in the need for the control of the data rate to reduce interference and increase capacity. In the exemplary embodiment of a CDMA multi-cell cellular communications network, the main capacity limit on forward link communications is the interference from neighboring cells as illustrated by the propagation lines drawn from the cell base stations 12 and the single remote user or mobile station 10. The second effect on forward link capacity in the present embodiment is illustrated by the second propagation path 18 from a single cell base station to a mobile station 10. The cause of this effect, known as multipath, is reflection off of obstruction 16 which may take the form of a

building, a mountain, or any other object that is capable of reflecting electromagnetic waves.

In the exemplary embodiment, interference is received by remote user 10 from cell base stations 12 which are not communicating with the remote user, and interference is received by multipath signals from obstruction 16. In the exemplary embodiment, the operation of a group of cells is overseen by the system controller 14 that provides the data to and from a public telephone switching network (not shown). These communications are referred to as forward link communications.

In systems like time division multiple access (TDMA) and frequency division multiple access (FDMA), a "hard" capacity limit exists due to the finite number of time slot or frequency sub-band divisions, respectively. When all of the time slots or subbands are allocated to users, the "hard" capacity limit is reached and service to any additional user is impossible. Though the users that have accessed the system before the capacity limit remain unaffected by any excluded users, the average quality of service to all users drops beyond the capacity limit since the quality of service for each additional user denied service is zero.

In multiple access schemes such as code division multiple access (CDMA) and random access systems like ALOHA and slotted ALOHA systems, a "soft" capacity limit exists. For these types of multiple access systems, the increase of the number of system users beyond a capacity limit causes a decrease in the quality of service to all users of the system. In a CDMA system, the transmissions of each user are seen as interference, or noise, to each other user. Beyond the soft capacity limit of a CDMA system, the noise floor becomes large enough to cause the predetermined allowable BER or FER to be exceeded. In random access schemes, each additional user increases the probability of a message collision. Beyond a capacity limit the message collisions grow so frequent that the need for retransmission or the resultant lost data causes the communication quality of all users to suffer.

Figure 3 is a graph of the average quality of service to users of such a multiple access communication system versus the number of users occupying the system, given a specified average data rate for all users. The average quality ( $Q_{ave}$ ) of service is defined as:

$$Q_{ave} = \frac{1}{N} \sum_{i=1}^N Q_i \quad (1)$$



where  $Q_i$  is quality of service to user  $i$  and  $N$  is the number of users on the system.

Figure 3 also illustrates a quality line above which the average service quality is acceptable and below which the service quality is unacceptable.

- 5 The intersection of the quality line with the plot of quality versus number of users curve defines the capacity limit of the system at the data rate of the system. In the exemplary embodiment of a CDMA system, messages are transmitted in 20 ms frames, and a tolerable frame error rate of 1% dictates the position of the quality line in the exemplary embodiment. It is  
10 understood that different frame sizes and error rates are equally applicable to the present invention.

- Figure 4 illustrates three plots 20, 22, and 24 of average quality of service versus number users for three progressively decreasing average data rates. Plot 20 corresponds to the quality curve for a high average data rate,  
15 plot 22 corresponds to the quality curve for a moderate average data rate, and plot 24 corresponds to the quality curve for a low average data rate.

- The first important feature in the plots is that the intersection of the plots with the vertical axis is progressively lower for lower link data rates. Below capacity limits, higher allowable data rates correspond to higher  
20 quality, since a high data rate allows more precise quantization of the parameters in the variable rate speech coder, resulting in cleaner sounding speech.

- The second important feature in the plots is the intersections of the quality line with the three plots. The intersections of the quality line with  
25 each of the curves 20, 22 and 24 provides the capacity limit for the system at the respective data rates of curves 20, 22 and 24. The system capacities labeled CAP A, CAP B, and CAP C are the number of users that can access the system at the data rates of each of curves 20, 22 and 24. The capacity limit at a given data rate is obtained by dropping a vertical line, as shown in  
30 the diagram, from the intersection of the plot and the quality line to the horizontal axis representing the number of users. The capacity of the system increases for a fixed quality level as the data rate decreases.

- Figure 5 is a flowchart illustrating the method of maximizing the average quality by controlling the data rate of transmission on the system.  
35 At block 30 the amount of communications resource that is in use is determined, based on the number of users accessing the system on the given link and the data rate transmitted by each user. The usage value computed in block 30 is passed to block 32. In block 32 the usage value is compared against a lower threshold. If the usage value is below the lower threshold

then the operation goes to block 34 where it is determined if the link is operating at a predetermined data rate maximum. If the system is operating at the predetermined data rate maximum, the operation moves to block 38 and no action is taken. If the system is operating below the predetermined data rate maximum, the operation proceeds to block 36 and the link data rate is increased.

If back at block 32 it is determined that the link usage is not too low, the operation proceeds to block 40 where the usage is compared against an upper threshold. If in block 40 the link usage is determined to be below the upper threshold, the operation proceeds to block 41 and no action is taken. If on the other hand, the link usage exceeds the upper threshold in block 40, the operation proceeds to block 42. In block 42, the system data rate is compared against a predetermined minimum. If the system data rate is greater than this predetermined minimum then the operation proceeds to block 44 where the link data rate is decreased.

If at block 42 the link data rate was determined to be equal to the minimum link data rate then the operation proceeds to block 46. At block 46 the system compares the usage to a predetermined usage maximum. If the communications resource is exhausted, that is the usage is equal to the predetermined maximum, then the operation proceeds to block 48 and access by any additional users is blocked. If the usage is below the predetermined usage maximum then, then operation proceeds to block 50 and no action is taken.

In TDMA systems, data rates can be modified by spreading data of a given user among a plurality of allocated time slots or combining the data of a plurality of users with selected ones of allocated time slots. In an alternative implementation variable data rates could be achieved in a TDMA system by allocating time slots of varying length to different users. Similarly, in FDMA systems data rates can be modified by spreading data of a given user among a plurality of allocated frequency sub-bands or combining the data of a plurality of users with selected ones of allocated frequency sub-bands. In an alternative implementation variable data rates in a FDMA system could be achieved by allocating varying frequency sub-bands sizes to different users.

In random access systems the probability of message collisions is proportional to the amount of information each user needs to send. Therefore, the data rate can be adjusted directly by sending varying size packets of data or by sending the packets at varying time intervals between transmission.

In the exemplary embodiment using a CDMA system, the amount of data necessary for transmission of speech is adjusted by use of a variable rate vocoder as detailed in Application Serial No. 08/004,484 mentioned above. The variable rate vocoder of the exemplary embodiment, provides data at  
5 full rate, half rate, quarter rate and eighth rate corresponding to 8Kbps, 4Kbps, 2Kbps and 1Kbps, but essentially any maximum average data rate can be attained by combining data rates. For example, a maximum average rate of 7Kbps can be attained by forcing the vocoder to go to half rate every fourth consecutive full rate frame. In the exemplary embodiment, the  
10 varying size speech data packet, is segmented and segments are provided at randomized times as is detailed in U.S. Patent Application Serial No. 07/846,312 entitled "Data Burst Randomizer," assigned to the assignee of the present invention and incorporated by reference herein.

A useful way of looking at the issue of communications resource  
15 capacity is to view the available communications resource as a pie chart, where the whole pie represents the complete exhaustion of the communication resource. In this representation sectors of the pie chart represent fractions of the resource allocated to users, system overhead, and unused resource.

In a TDMA or FDMA system the whole of the pie chart may represent the number of available time slots or frequency sub-bands in a given allocation strategy. In a random access system, the whole of the pie chart may represent the message rate that is acceptable before message collisions grow so great as to make the transmission link unacceptable. In the  
20 exemplary embodiment of a CDMA system, the whole of the pie chart represents the maximum tolerable noise floor wherein the overhead and signal from all other users appear as noise in the reception of the message data to and from the remoter users. In any system configuration, referring back to Figure 3, the whole of the resource pie represents the intersection of  
25 the quality line with the average quality versus number of users plot.

Figure 6 illustrates an example of a general forward link capacity pie chart. The first sector of the resource pie labeled OVERHEAD represents the portion of the transmission signal that does not carry message information. The OVERHEAD fraction of the pie represents the transmission of non-  
30 message non-user-specific data and in the exemplary embodiment is a fixed fraction of the communication resource though in other systems this overhead may vary with the number of users or other factors. The OVERHEAD may include base station identification information, timing information and base station setup information among other things. The

OVERHEAD may include pilot channel usage of the communications resource. An example of a pilot channel is detailed in U.S. Patent Serial No. 5,103,459, entitled "System and Method for Generating Signal Waveforms in a CDMA Cellular Telephone System (CDMA)," assigned to the assignee of the present invention and incorporated herein by reference. Each of the following sectors numbered 1-20 represents a the message information directed to a particular user, where the users are numbered 1-20. The last sector of the pie, moving in a clockwise direction, is labeled with a B. The sector labeled with a B represents the remaining fraction of available communication resource before unacceptable link degradation occurs.

Figure 7 is a resource pie chart for the reverse link communications. This pie chart represents the information received at the main transmission center or base station from the remote users. The only significant difference between this pie chart and the previous pie chart is in the reverse link there is no fixed OVERHEAD resource. It should also be noted that in the preferred embodiment each user uses the same fraction of communication resource in order to maximize the quality of service to all users. The method and apparatus for maintaining the condition wherein all users use the same fraction of received communication resource is detailed in U.S. Patent No. 5,056,109 entitled "Method and Apparatus for Controlling Transmission Power in a CDMA Cellular Telephone System" assigned to the assignee of the present invention and incorporated by reference herein. In this approach, each remote user transmits at a power level such that it is received at the base station as all other remote users. Preferably, each remote user transmits at a minimum power level necessary to insure a quality communication link with a base station.

Figure 8 is an action pie chart that represents the actions to be followed with respect to the resource pie charts. Labeled on the pie chart of Figure 7 are three points, a point marked INCREASE RATE, a point marked DECREASE RATE and a point marked BLOCK ADDITIONAL USERS. If the fraction of the resource pie for a given link exceeds the point marked DECREASE RATE, the transmission rate on that link should be decreased to improve the quality of service to the users. For example, if the data rate corresponding to plot 20 in figure 4 was being transmitted by all users and the number of users became greater than CAP A, the data rate would be decreased, and the system would then operate on plot 22 in figure 4. If the fraction of the resource pie for a given link falls below the point marked INCREASE RATE, the transmission rate on that link should be increased to

improve the quality of service to the users. For example, if the data rate corresponding to plot 22 in figure 4 was being transmitted by all users and the number of users dropped below CAP A, the data rate would be increased and the system would operate on plot 20 in figure 4. If the pie reaches the point marked BLOCK ADDITIONAL USERS then any additional users should be blocked from accessing the system. Note that the only way the system would reach the BLOCK ADDITIONAL USERS point is by going through the DECREASE RATE point which implies that the rate could not be further decreased.

Figures 9 and 10 illustrate the effects of decreasing the transmission rate on the resource allocation. In Figure 8, the addition of user 20 has caused the resource allocation to surpass the point at which the transmission rate should be decreased. At this point the transmission rate is decreased and the resource pie for the same users looks like Figure 9. Notice the unused portion of the resource pie labeled B is large enough to permit additional users to access the communication resource. Thus, additional users can access the communication system until the system requires the transmission rate to be decreased again. This process will continue until the rate is at a minimum. If this occurs, the system allows the pie to fill entirely and then any new users are prevented from accessing the system.

In contrast as users leave the communication resource then the fraction of the communication resource that is used decreases below the INCREASE RATE point and the system will increase the transmission rate. This can continue until the transmission rate is increased to a maximum rate or until no users are accessing the communication resource.

Figure 11 illustrates a block diagram for the monitor and control of the reverse link communication resource usage at the main communications center, which may include the cell base station and the system controller. The signals from the remote users are received at receive antenna 60. The received signals are provided to receiver 62 which provides the data in analog or digital form to energy computation element 66 and demodulators 64. The computed energy value from energy computation element 66 is provided to rate control logic 68 which compares the received signal energy to a series of thresholds. In response to the comparisons, rate control logic 68 provides a rate control signal to microprocessors 70 when the signal energy is above an upper threshold or is below a lower threshold. In other embodiments, the rate control logic 68 could also be responsive to external factors which may affect the

performance of the communications channel, such as weather conditions, etc.

The received signal from receiver 62 are provided to demodulators 64, where it is demodulated and the data for a specific user is extracted and provided to the corresponding microprocessor 70. In the exemplary embodiment, as detailed in U.S. Patent Application Serial No. 07/433,031 entitled "Method and System for Providing a Soft Handoff in Communication in a CDMA Cellular Telephone System" assigned to the assignee of the present invention and incorporated by reference herein, the received data is provided by microprocessors 70 to selector cards (not shown) in a system controller 14 that selects a best received data from received data from a plurality of main communication centers (cells), each of which contains a receiver 62 and a demodulator 64, and decodes the best received data using a vocoder (not shown). The reconstructed speech is then provided to a public telephone switching network (not shown).

In addition, microprocessors 70 receive data for forward link transmission from the vocoders (not shown) through the data interface. Microprocessors 70 combine the reverse link rate control signal, when present, with the outgoing forward link data to provide composite data packets to modulators 72. In a preferred embodiment, ones of microprocessors 70 would selectively combine the reverse link rate control when present to with outgoing forward link data. In the preferred embodiment, ones microprocessors 70 are responsive to a signal indicative of overriding conditions where upon the reverse rate control signal is not combined with the outgoing forward link data. In alternate embodiment, certain ones of said microprocessors 70 would not be responsive to the reverse link rate control signal. Modulators 72 modulate the data packets and provide the modulated signals to summer 74. Summer 74 sums the modulated data and provides it to transmitter 76 where amplified and provided to transmission antenna 78.

Figure 12 illustrates a block diagram of the remote user apparatus of the present invention for responding to the rate control signal provided in the exemplary embodiment by main transmission center 2 in figure 1. On the receive path, the signal that comprises encoded speech data and/or signaling data is received at antenna 90, which also serves as the transmission antenna by means of duplexer 92. The received signal is passed through duplexer 92 to demodulator 96. The signal is then demodulated and provided to microprocessor 98. Microprocessor 98 then decodes the signal and passes the speech data and any rate control data that

is sent by the base station to the variable rate vocoder 100. Variable rate Vocoder 100 then decodes the encoded packet of speech data provided from microprocessor 98 and provides the decoded speech data to codec 102. Codec 102 converts the digital speech signal into analog form and provides the  
5 analog signal to speaker 106 for playback.

On the transmit path of the remote user, a speech signal is provided through microphone 106 to codec 102. Codec 102 provides a digital representation of the speech signal to the variable rate vocoder 100 which encodes the speech signal at a rate determined in the exemplary  
10 embodiment in accordance with the speech activity and the received rate signal. This encoded speech data is then provided to microprocessor 98.

In the exemplary embodiment, the rate control signal is a binary signal indicating to the remote user to increase or decrease the maximum data rate. This adjustment of the data rate is done in discrete levels. In the  
15 exemplary embodiment, the remote user will increase or decrease its maximum transmission rate by 1000 bps upon receipt rate control signaling from the cell base station. In practice, this reduces the overall average data rate by 400 to 500 bps, since the vocoder is only encoding the speech at the maximum rate 40-50% of the time in a normal two-way conversation. In  
20 the exemplary embodiment, the silence between words is always encoded at the lower data rates.

For example, if the remote user is currently operating with a maximum transmission data rate of full rate or rate 1 (8 Kbps), and a signal decrease its maximum data rate is received, the maximum transmission  
25 data rate will be decreased to 7/8 (7 Kbps) by forcing every fourth consecutive full rate frame of data to be encoded at half rate (4Kbps). If on the other hand, the remote user is operating under control of the cell base station at a maximum transmission rate of 3/4 (6 Kbps) and the cell base station signals the remote user to increase its maximum data rate, then the  
30 remote user will use a rate 7/8 (7 Kbps) as a maximum transmission data rate. In a simplified embodiment the rates could simply be limited to one of the discrete rates provided by variable rate vocoder 100 (i.e., rates 1, 1/2, 1/4 and 1/8).

Microprocessor 98, also, receives non-speech data that can include  
35 signaling data or secondary data such as facsimile, modem, or other digital data that needs communication to the cell base station. If the digital data being transmitted by the remote user is of a form not conducive to variable rate transmission (i.e. some facsimile or modem data) then microprocessor

98 can decide based upon the service option of the remote user whether to vary the transmission rate in response to the rate control signal.

Modulator 108 modulates the data signal and provides the modulated signal to transmitter 110 where it is amplified and provide through  
5 duplexer 92 to antenna 90 and transmitted over the air to the base station. It is also envisioned in the present invention that the remote user could monitor the reverse link communication resource and respond in an open loop manner to adjust its transmission rate.

Figure 13 illustrates a block diagram of an exemplary forward link  
10 rate control apparatus. Speech data is provided to vocoders 120 where the speech data is encoded at a variable rate. In the present invention the encoding rate for the speech data is determined in accordance with the speech activity and a rate control signal when present. The encoded speech is then provided to microprocessors 122, which also may receive non-speech  
15 data from an external source (not shown). This non-speech data can include signaling data or secondary data (facsimile, modem or other digital data for transmission). Microprocessors 122 then provide data packets to modulators 124 where the data packets are modulated and provided to summer 126. Summer 126 sums the modulated signal from modulators 124  
20 and provides the sum signal to transmitter 128 where the signal is mixed with a carrier signal, amplified and provided to antenna 130 for transmission.

The summed modulated signal from summer 126 is also provided to energy computation unit 132. Energy computation unit 132 computes the  
25 energy of the signal from summer 126 for a fixed time period and provides this energy estimate to rate control logic 134. Rate control logic 134 compares the energy estimate to a series of thresholds, and provides a rate control signal in accordance with these comparisons. The rate control signal is provided to microprocessors 122. Microprocessors 122 provide the rate  
30 control signal to vocoders 120 for control of the maximum data rate of speech data. Optionally, microprocessors 122 can also use the rate control signal to control the data rate of non-speech data sources (not shown). the rate control signal can be provided selectively to ones of microprocessors 122 or alternately selects ones of microprocessors 122 can be responsive to a  
35 globally provided rate control signal.

The open loop form of control on the forward link described above can also operate in a closed loop, which can be responsive to signals from the remote stations indicative of capacity limits being reached, such as high frame error rates or other measurable quantities. Rate control logic 134 can



be responsive to external interferences of various kinds which may also affect the performance of the communications channel.

The previous description of the preferred embodiments is provided to enable any person skilled in the art to make or use the present invention.

- 5 The various modifications to these embodiments will be readily apparent to those skilled in the art, and the generic principles defined herein may be applied to other embodiments without the use of the inventive faculty. Thus, the present invention is not intended to be limited to the embodiments shown herein but is to be accorded the widest scope consistent  
10 with the principles and novel features disclosed herein.

**WE CLAIM:**

## CLAIMS

1. In a communications network wherein a plurality of remote  
2 users each having a transmitter communicate message signals to a  
communications center having a receiver, a subsystem for optimizing  
4 communications quality in accordance with system usage and capacity  
comprising:  
6 monitor means for determining said system usage and conditionally  
providing a rate control signal in accordance with said usage level; and  
8 a plurality of response means each collocated with a corresponding  
one of said remote users for receiving said rate control signal and adjusting  
10 said data rate of said corresponding one of said remote users in accordance  
with.
2. The subsystem of Claim 1 wherein said monitor means is  
2 collocated with said transmission center, said subsystem further comprising:  
communications center transmitter means for transmitting messages  
4 to said remote users and for transmitting said rate control signal to said  
remote users; and  
6 plurality of remote receiver means, each of said plurality of remote  
receiver collocated with a corresponding one of said remote users for  
8 receiving said rate control signal and for providing said rate control signal  
to a corresponding one of said response means.
3. The subsystem of Claim 1 wherein said monitor means  
2 determines said system usage by measuring the energy of said message  
signals for a predetermined time period.
4. The subsystem of Claim 1 wherein said response means  
2 comprises:  
processor means for receiving said rate control signal and providing a  
4 rate command signals in response to said rate control signal; and  
variable rate vocoder means for receiving speech data and said rate  
6 command signals and encoding said speech data at a rate in accordance with  
said command signals.
5. The subsystem of Claim 4 wherein said variable rate vocoder  
2 means further encodes said speech data in accordance with the energy of  
said speech data.

6. The subsystem of Claim 4 wherein said processor means is  
2 further for receiving non-speech data for transmission and for providing  
said non-speech data at a rate in accordance with said rate control signal.

7. A variable rate transceiver comprising:  
2 a receiver for receiving a signal comprising message data and a rate  
control command;  
4 a variable rate vocoder for receiving speech data and encoding said  
speech data in accordance with said rate control command; and  
6 a transmitter for transmitting said encoded speech data.

8. The variable rate transceiver of Claim 7 further comprising:  
2 a demodulator disposed between said receiver and said variable rate  
vocoder for demodulating said received signal; and  
4 a processor disposed between demodulator and said variable rate  
vocoder for receiving said demodulated signal and separately providing said  
6 message data and said rate control command.

9. The variable rate transceiver of Claim 8 wherein said processor  
2 is further for receiving non-speech data for transmission.

10. The variable rate transceiver of Claim 7 further comprising a  
2 modulator disposed between said variable rate vocoder and said transmitter  
for modulating said encoded speech data.

11. The variable rate transceiver of Claim 7 further comprising a  
2 modulator disposed between said variable rate vocoder and said transmitter  
for modulating said encoded speech data.

12. At a base station, an apparatus for controlling the user capacity  
2 of said base station comprising:  
usage determination means for measuring usage of said base station;  
4 rate control means for comparing said measured usage against at least  
one predetermined value and selectively providing a rate control signal in  
6 accordance with said comparisons; and  
transmitter means for transmitting said rate control signal.

13. The apparatus of Claim 12 further comprising processor means  
2 for receiving message data for transmission to said remote users and said  
rate control signal and combining said message data with said rate control  
4 signal to provide a composite data packet.

14. The apparatus of Claim 13 further comprising a modulator  
2 means disposed between said processor means and transmitter for  
modulating said composite data packet.

15. In a communication system wherein a base station  
2 communicates messages on a forward link with a plurality of remote users  
an apparatus of controlling the data rate of said message communications,  
4 comprising:  
usage determination means for determining a usage value of said  
6 forward link;  
rate control logic means for receiving said usage value, comparing  
8 said usage value to at least one predetermined threshold value and  
conditionally providing a rate control signal in accordance with said  
10 comparisons; and  
at least one variable rate data source for providing data at a rate in  
12 accordance with said rate control signal.

16. The apparatus of Claim 15 wherein said at least one variable  
2 rate data source comprises at least one variable rate vocoder means for  
encoding speech data at variable rates.

17. The apparatus of Claim 15 wherein said usage determination  
2 means measures the energy of a signal for transmission to said remote  
users.

18. A method for optimizing usage of a communications resource,  
2 comprising the steps of:  
measuring said usage of said communications resource;  
4 comparing said measured usage against at least one predetermined  
threshold; and  
6 adjusting data rates of communications on said communications  
resource in accordance with said comparisons.

19. The method of Claim 18 wherein said step of comparing said  
2 measured usage against at least one predetermined threshold comprises  
comparing said usage against a predetermined high usage threshold, and  
4 wherein said step of adjusting data rates of communications on said  
communications resource comprises decreasing the data rate of  
6 communications when said usage exceeds said high usage threshold.

20. The method of Claim 18 wherein said step of comparing said  
2 measured usage against at least one predetermined threshold comprises  
comparing said usage against a predetermined low usage threshold, and  
4 wherein said step of adjusting data rates of communications on said  
communications resource comprises increasing the data rate of  
6 communications when said usage falls below said low usage threshold.

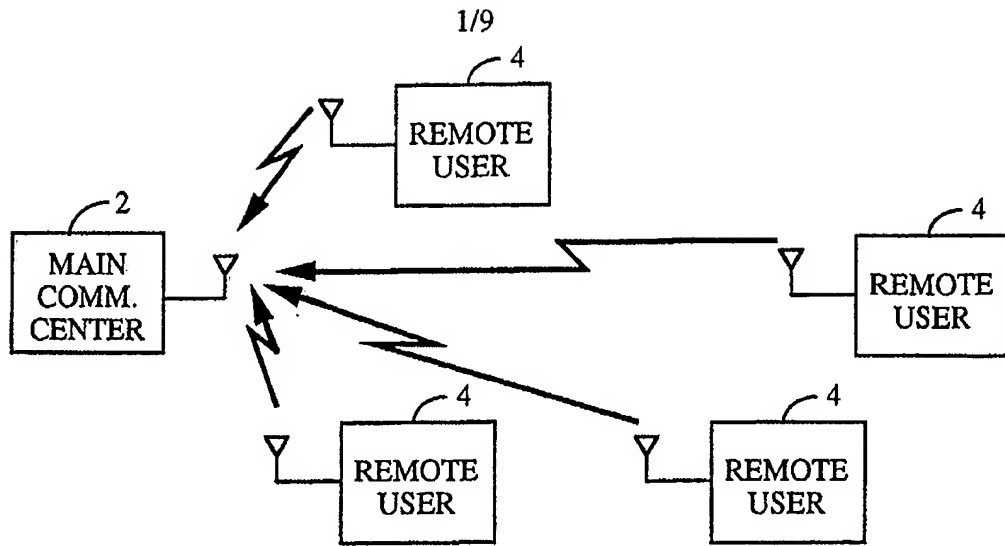


FIG. 1



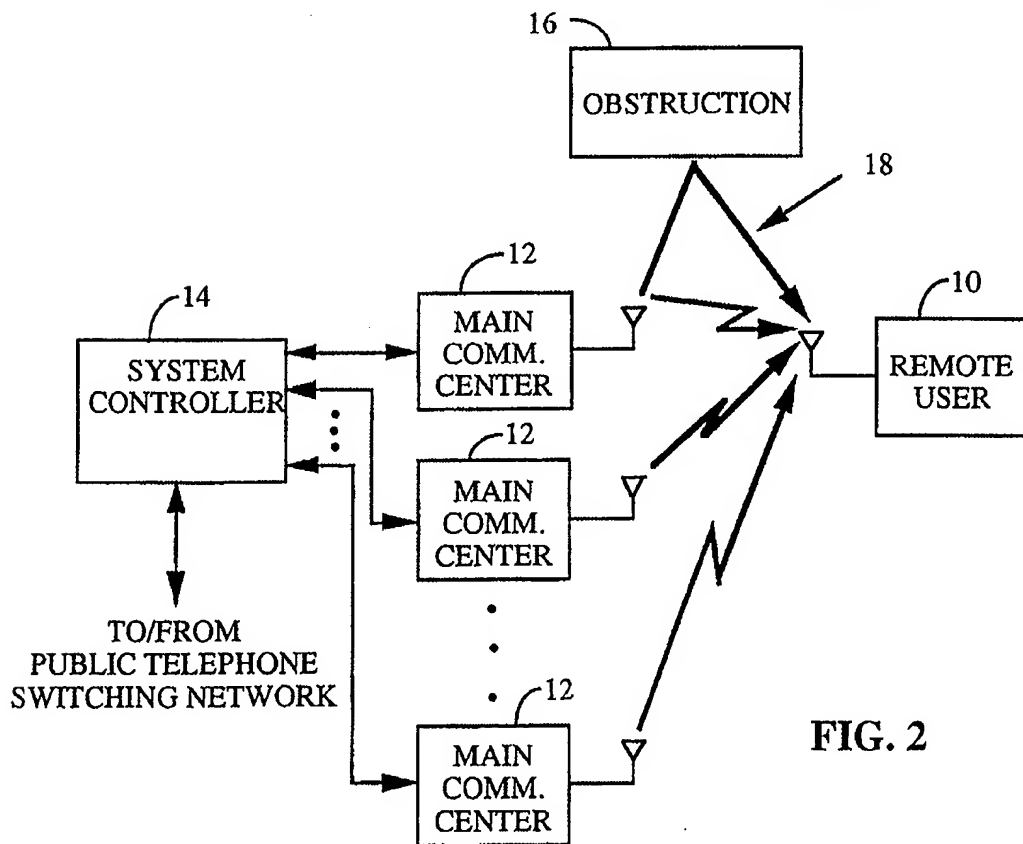


FIG. 2

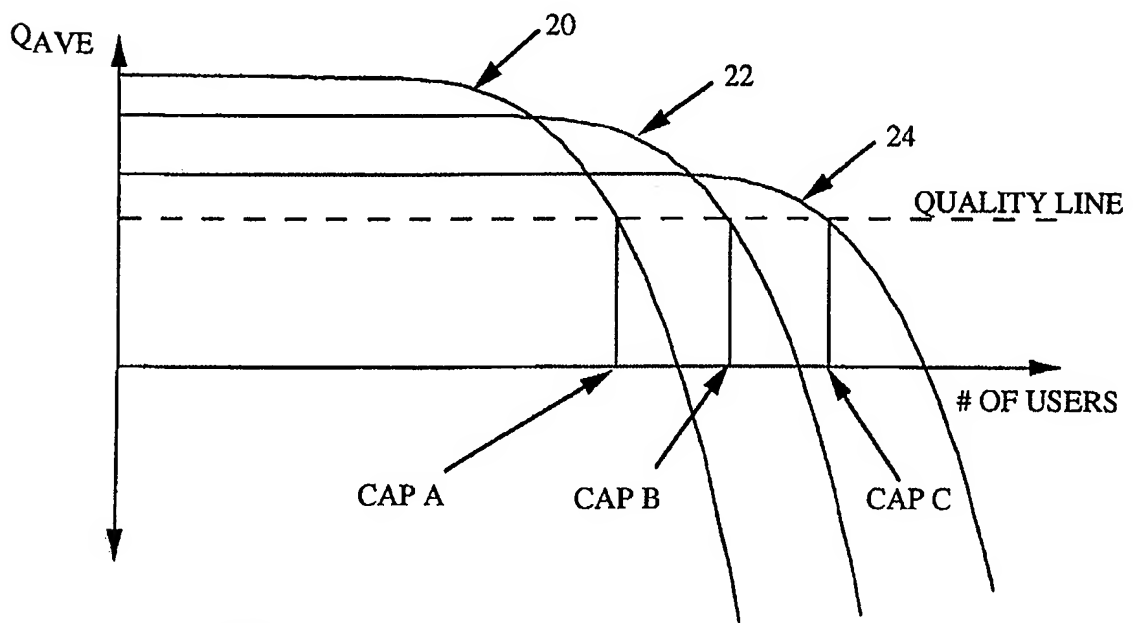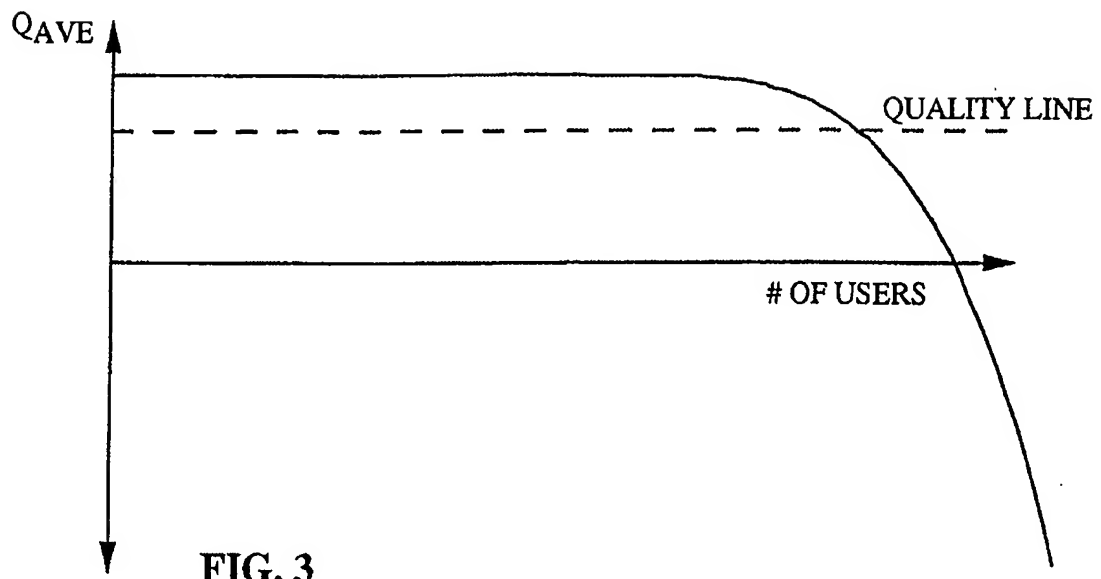

3/9

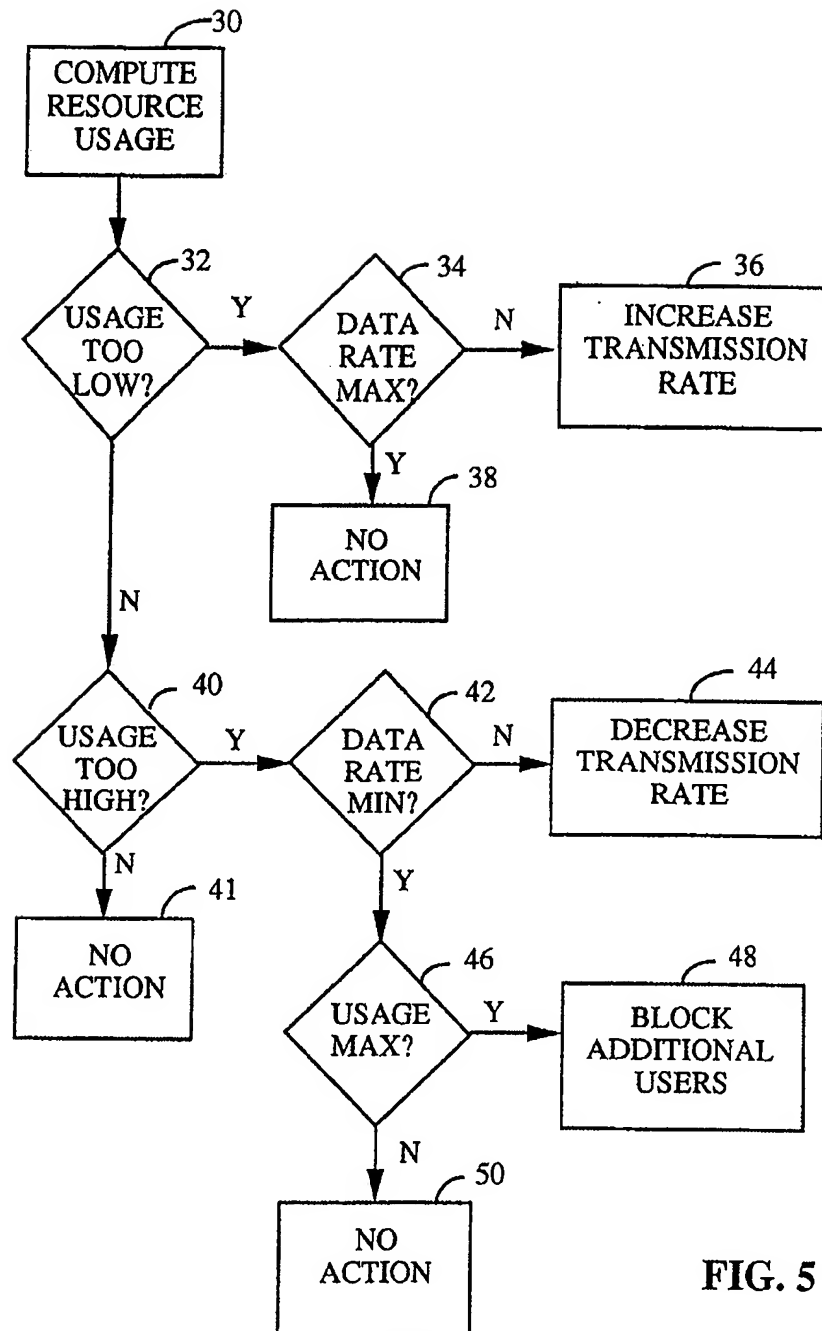


FIG. 5



4/9

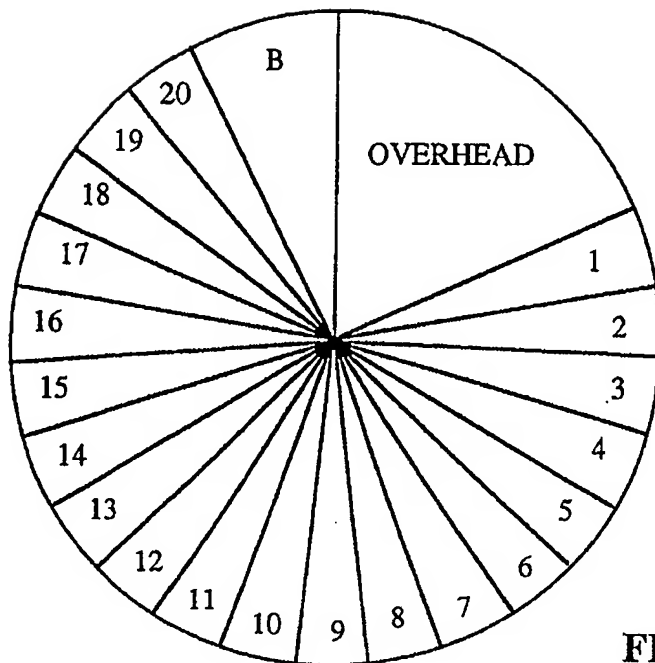


FIG. 6

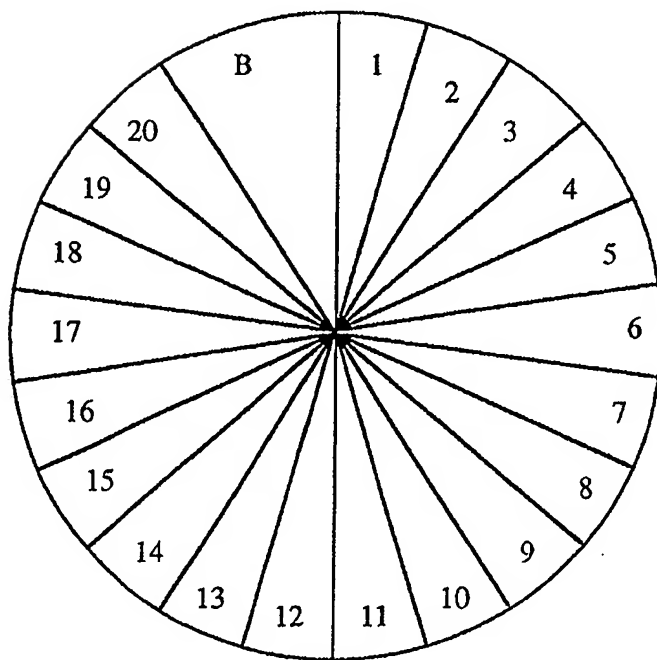
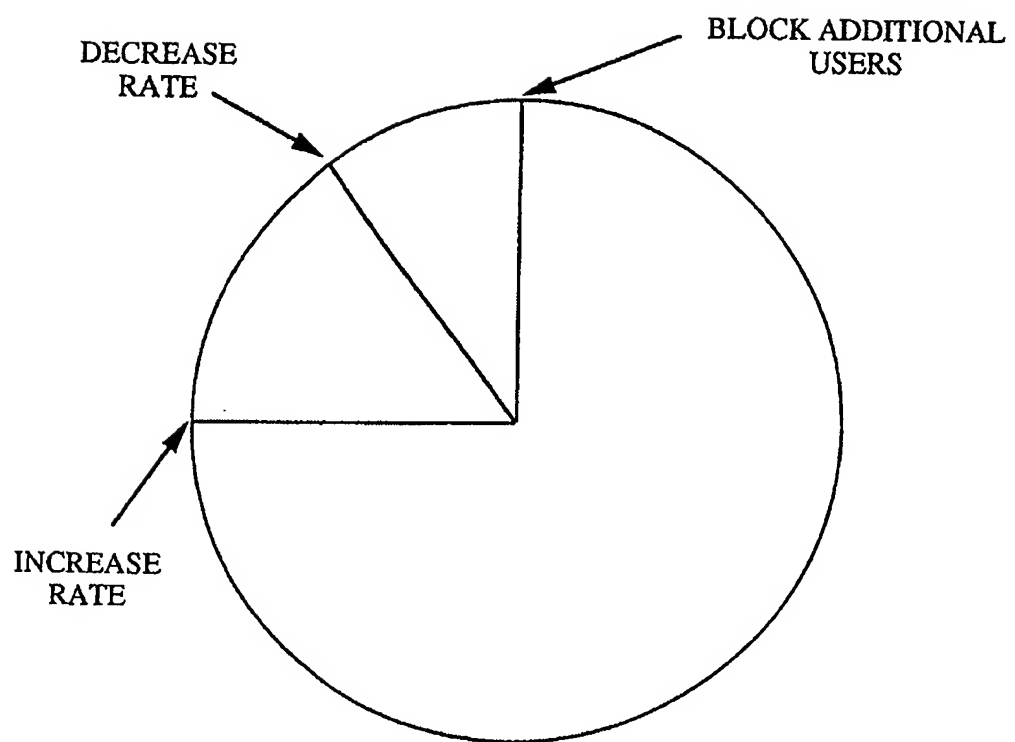


FIG. 7



**FIG. 8**

6/9

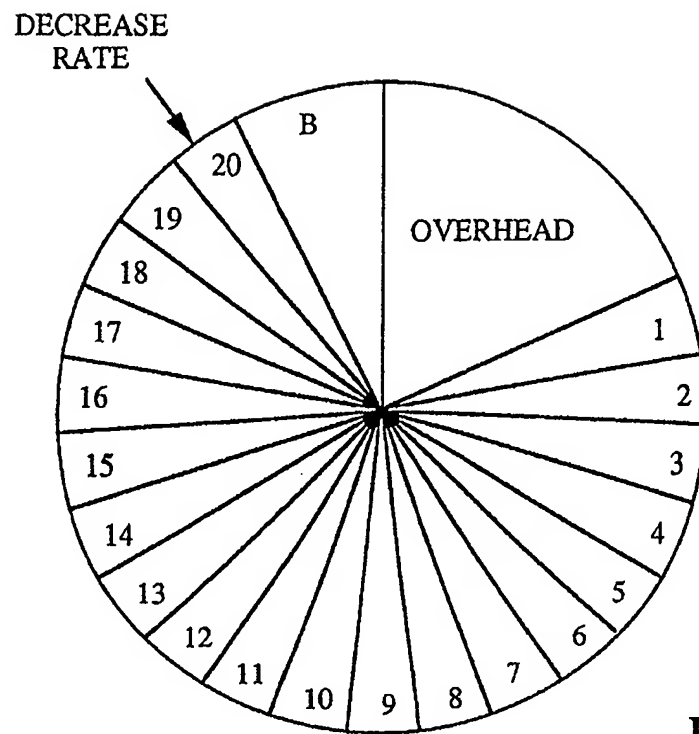


FIG. 9

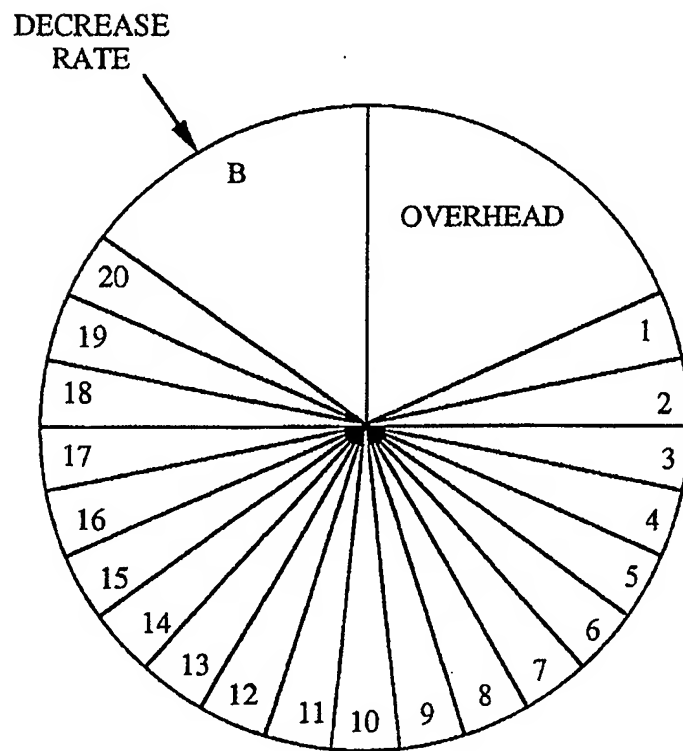


FIG. 10


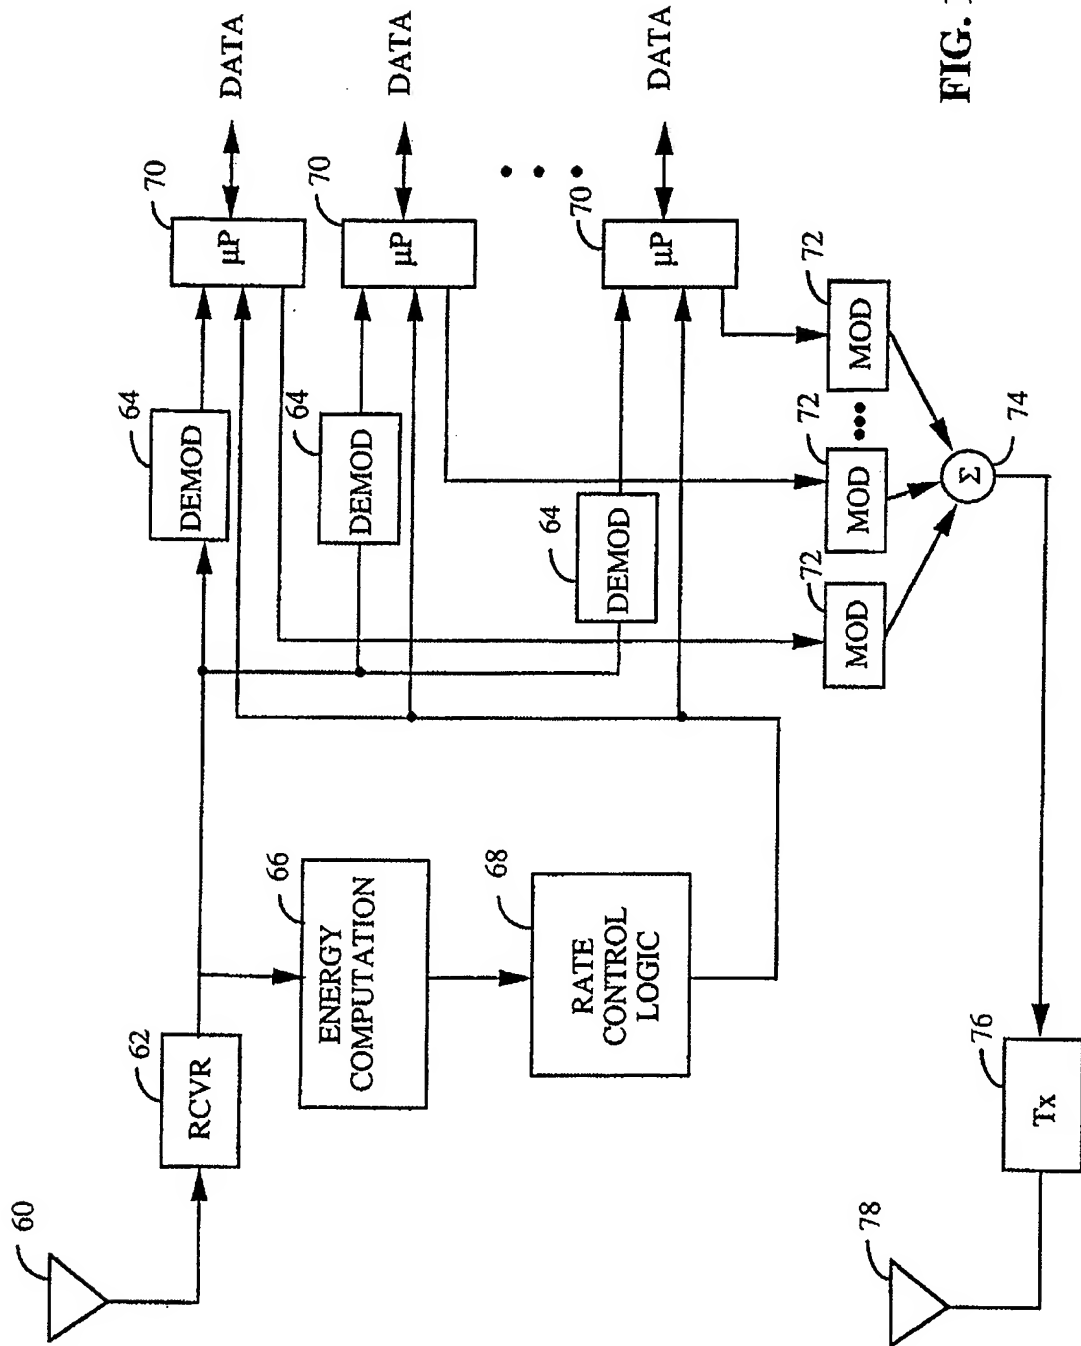


FIG. 11

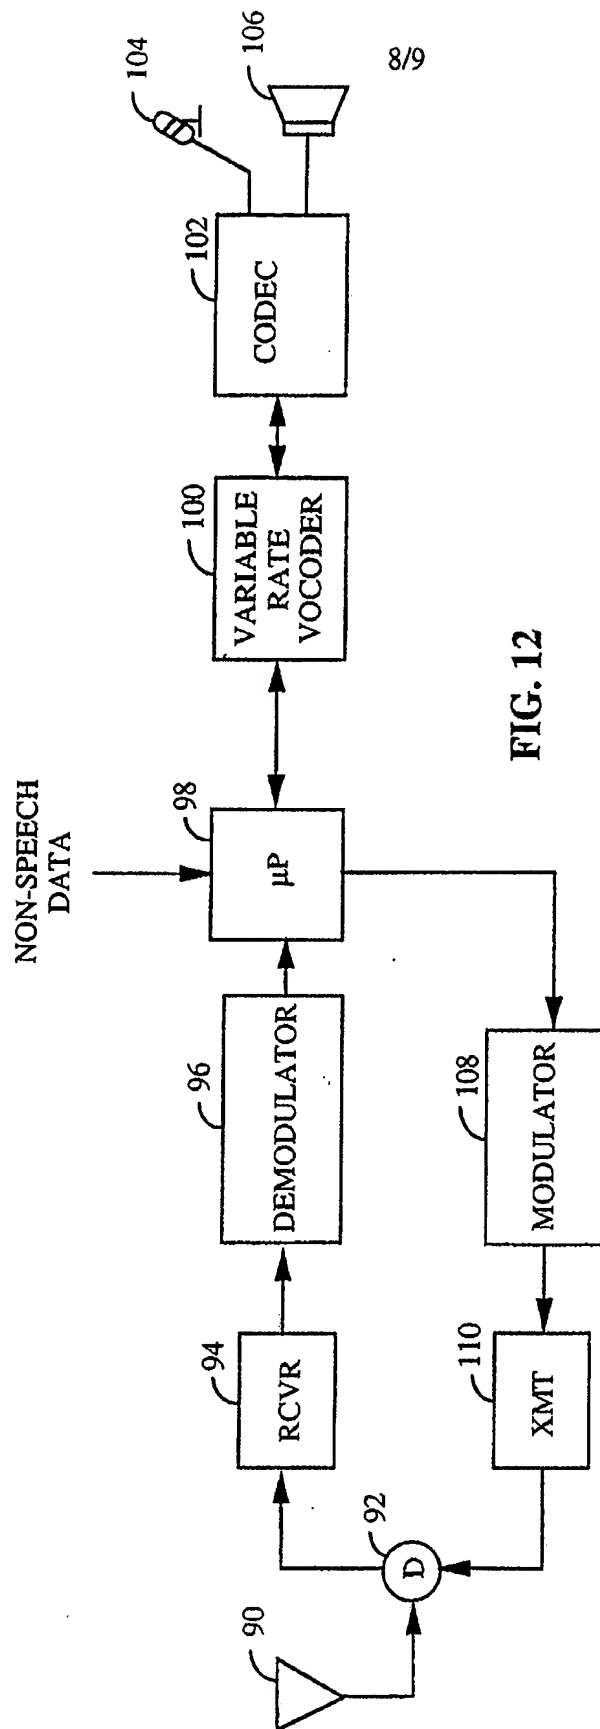

9/9

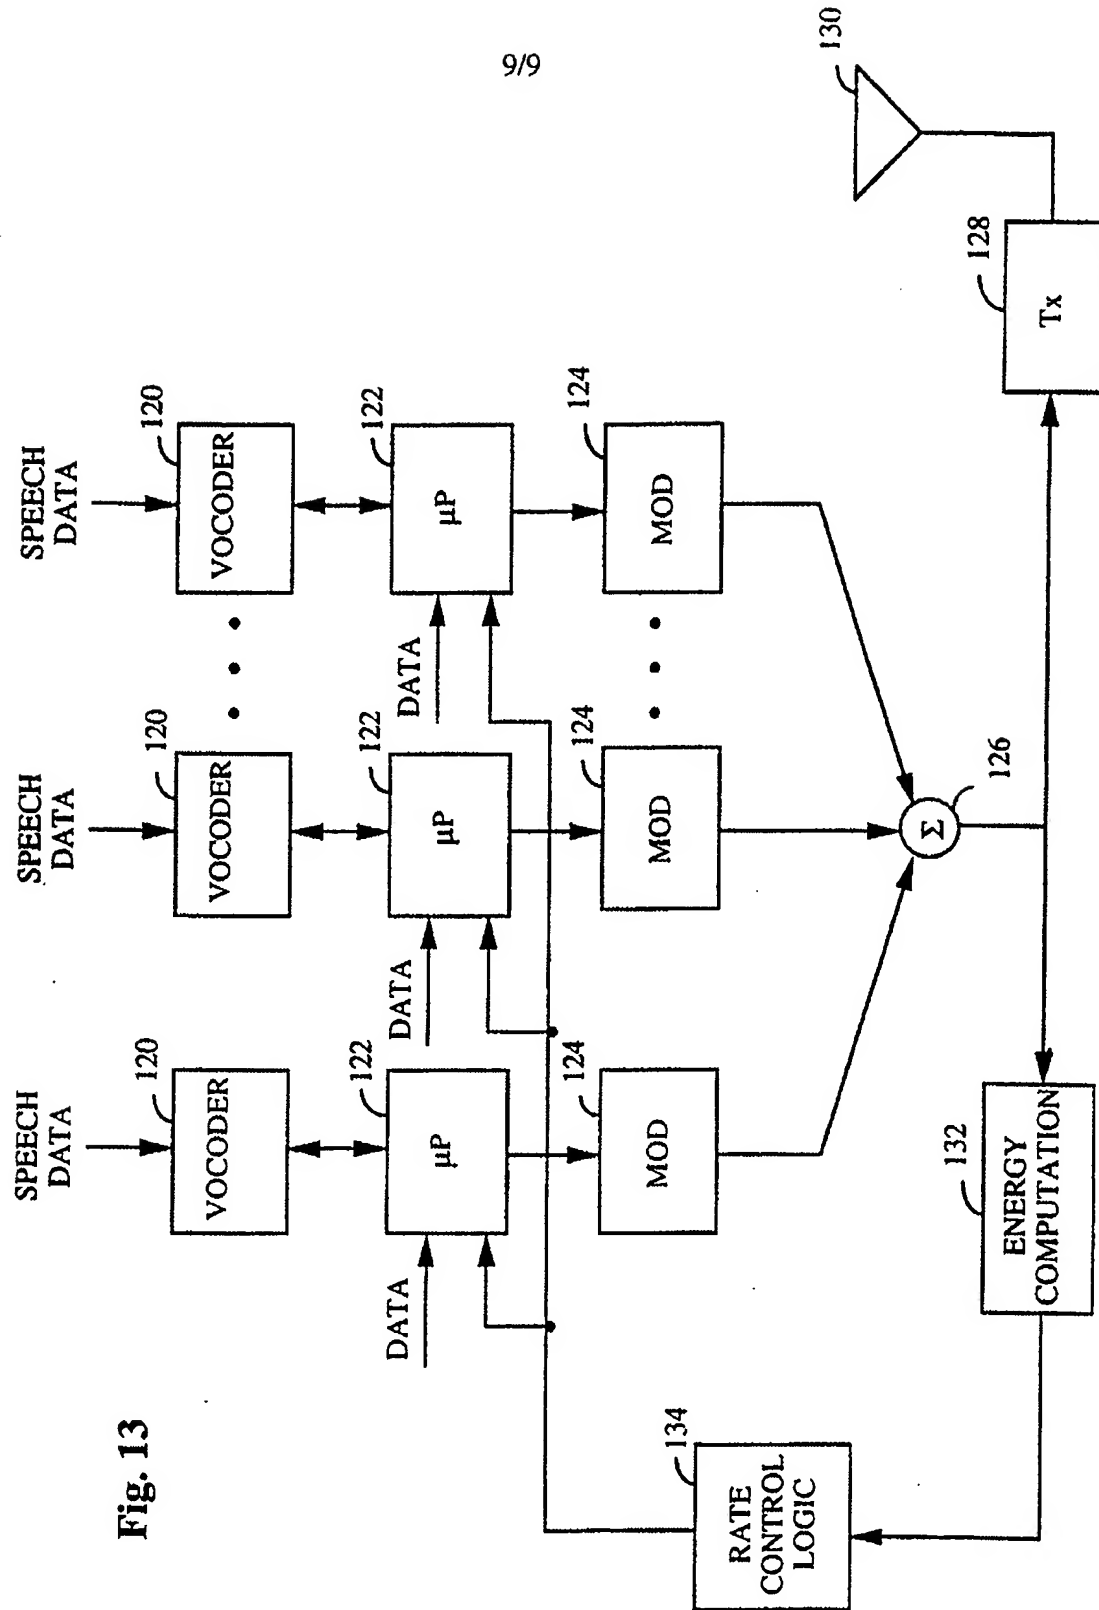


Fig. 13

# INTERNATIONAL SEARCH REPORT

Inter. Application No  
PCT/US 94/10087

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 6 H04B7/26 H04L1/12 H04Q7/38

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04Q H04B H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP,A,0 538 546 (MOTOROLA) 28 April 1993 see column 2, line 58 - line 21 ---	1-20
X	EP,A,0 353 759 (NORAND CORPORATION) 7 February 1990 see column 2, line 29 - column 3, line 1 ---	1,2,12, 13,15,18
X	EP,A,0 472 511 (ERICSSON) 26 February 1992 see column 3, line 37 - line 57 -----	1,2,12, 13,15,18

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*&\* document member of the same patent family

Date of the actual completion of the international search

3 November 1994

Date of mailing of the international search report

13.12.94

Name and mailing address of the ISA

European Patent Office, P.O. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Bischof, J-L

# INTERNATIONAL SEARCH REPORT

Information on patent family members

Inter. Application No

PCT/US 94/10087

Patent document cited in search report	Publication date	Patent family member(s)	Publication date	
EP-A-0538546	28-04-93	WO-A-	8706082	08-10-87
		AU-A-	5589086	20-10-87
		DE-D-	3689979	25-08-94
		EP-A-	0261112	30-03-88
		EP-A-	0412583	13-02-91
-----				
EP-A-0353759	07-02-90	US-A-	4910794	20-03-90
		AU-B-	632055	17-12-92
		AU-A-	3927889	08-02-90
		CA-A-	1316218	13-04-93
		GB-A, B	2223914	18-04-90
		US-A-	5070536	03-12-91
-----				
EP-A-0472511	26-02-92	AU-B-	642760	28-10-93
		AU-A-	8261991	27-02-92
		JP-A-	4234232	21-08-92
		NZ-A-	239283	27-09-94
		US-A-	5327576	05-07-94
-----				